

Beacon Pro

Datasheet

Front / Top

1 - Top Case


Bottom

- 2 - ON/OFF Switch
- 3 - Wall Mounting Holes

Side

- 4 - USB-C Charging-Port

Need help? Visit
helpcenter.guide-id.com

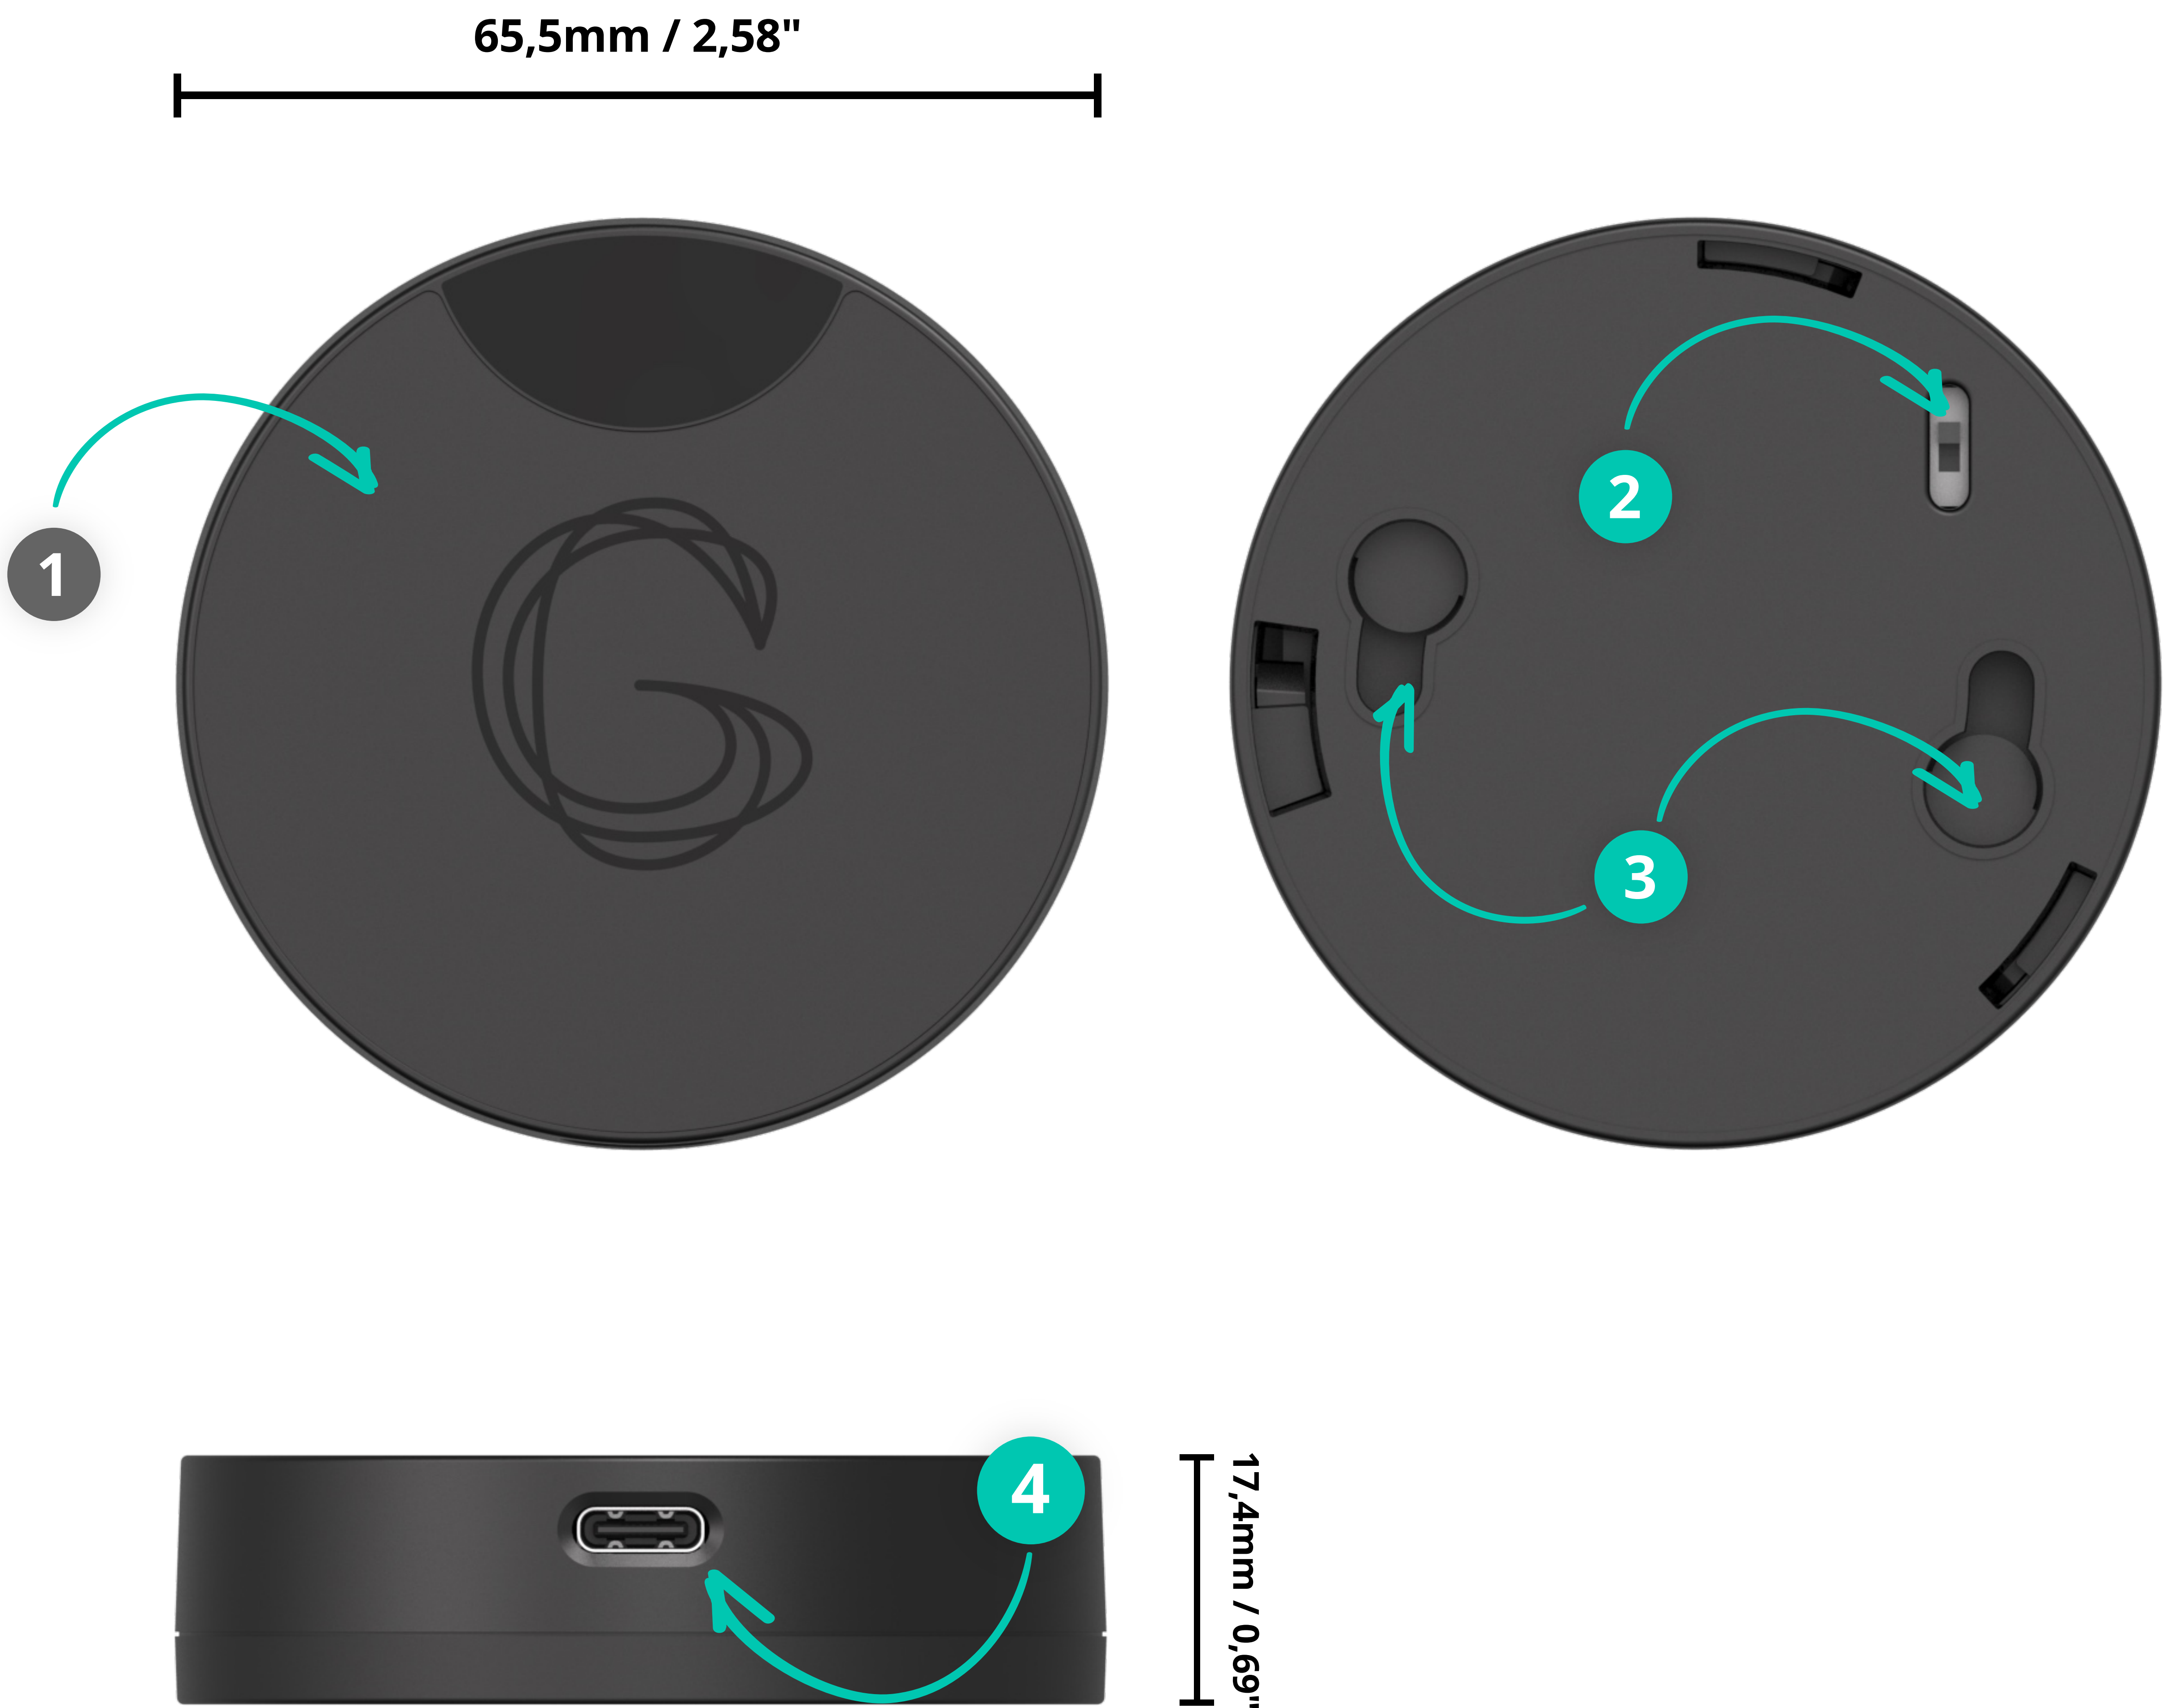

Internal

Battery:
Rechargeable 730 mAh 3.7 V lipo battery. Use the Beacon Pro up to 3 months continuously. Fully charged in 3 hours. Minimum lifetime of 500 complete cycles > 80%.

Bluetooth:
Energy efficient triggering by the Bluetooth Low Energy standard (BLE 5.1)

UWB (Ultra-wideband):
Distance measurements with accuracy up to 10 centimetres. Creates a zone to automatically trigger a stop or alarm. UWB Channel 5 (6.5 GHz)

Top

Infrared:
IR-window enables remote triggering up to 6 meters away. Trigger stops remotely over a distance up to 8 meters. Angle +-3 degrees. *(Coming soon)*

Sticker Chamber:
Stand out with full colour, customizable artwork sticker.

Bottom

ON/OFF Switch:
Disconnects the battery.

Wall Mounting Holes:
Screws: 4mm x 40 (0,16 x 1,57 in). Plugs: 6 x 30mm (0,24 x 1,18 in)